





VHDM-3108G

- VHDM-3108G monitor is the audio / video of 3G / HD / SD-SDI signals and it supports professional broadcasting Audio Video, Digital AES/EBU and adopts two 2.4-inch LCD
- Multifformat Video Audio Monitor displays Audio waveform, Phase, Loudness and is a device that can link Tally system
- 3G / HD/ SD-SDI 4 channel, AES/EBU 75Ω 4-channel, AES/EBU 110Ω 4-channel, Analog 4-channel. Audio and Front Speaker Volume control, balance control, XLR(PGM) Volume control, Mute, Alarm, Data Save & Load etc
- 1RU video audio monitor for OB-Van broadcast professional

Block Diagram

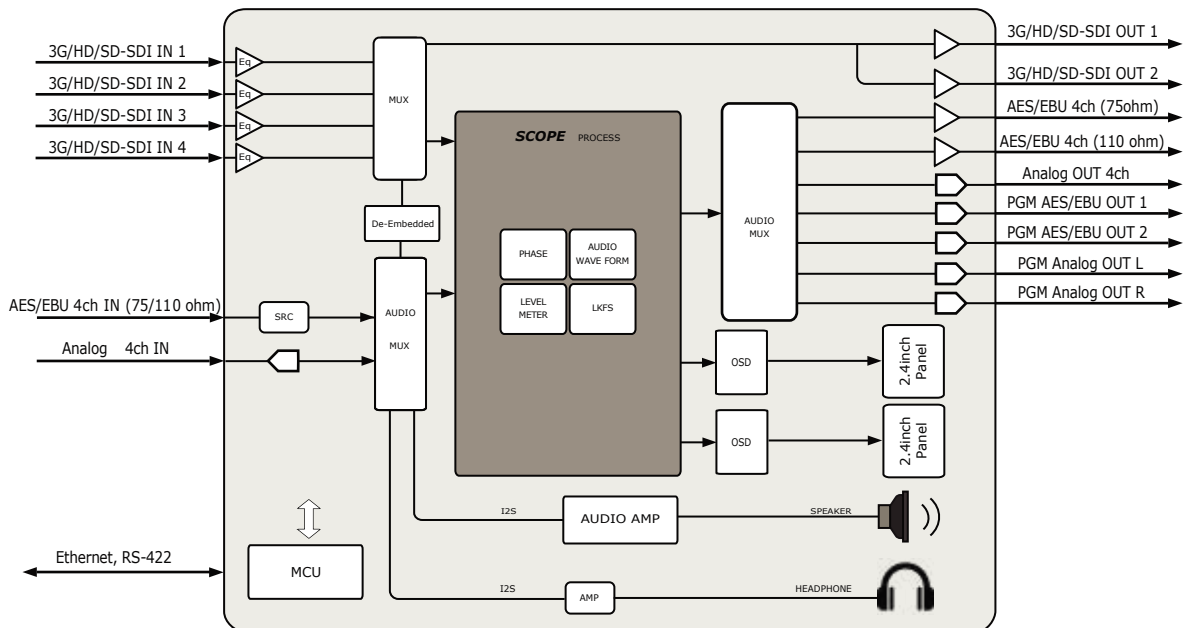

Feature & Functions

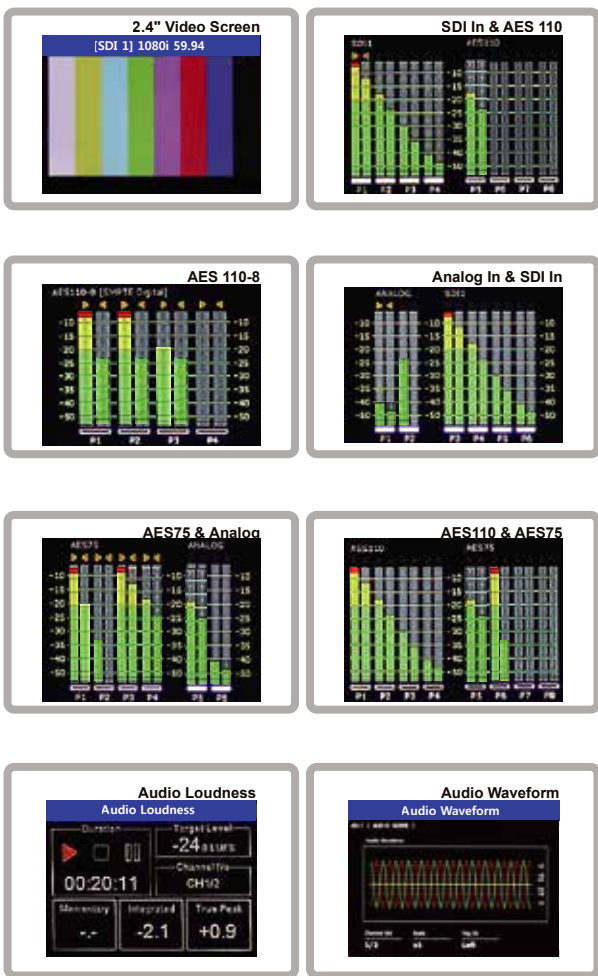

- SDI In & AES 110, Analog In & SDI In
- Audio Loudness, Audio Waveform
- Audio Loudness Monitoring
- Ability to monitor 3G / HD / SD-SDI embedded SDI audio, AES/EBU (75Ω, 110Ω), Analog
- Dual 2.4" TFT-LCD, Display Resolution 320x240
- Graphic Audio 16ch level meters
- Audio Level meter Scale : SMPTE Digital, EBU IRT, BBC, SMPTE IRT, France VU, Nordic, SMPTE VU, EBU Digital, Expanded DIN, EBU VU, DIN
- L/R Front Speaker, L/R Woofer Speaker
- SNMP system control
- 19" standard rack mountable (1RU)

Dimension

